ecomax™ by HOBART

SPEC SHEET

ECOMAX SERIES UNDER COUNTER DISHWASHER
MODEL ECO-F504-10B

ECOMAX ™

HOBART INDIA
501-502 Vipul Trade Center
Sector-48, Sohna Road
Gurgaon – 122002

Site No. 120/a, 121/1 Shiv Bhavan
Airport Bellary Road, Yelahanka
Bengaluru – 560064

ecomax™ by HOBART

SPEC SHEET

Description of the machine:
Pos. 1 Dishwasher Eco-F504-10B

Best results
- Rotating top and bottom wash system to distribute the wash water evenly over the dishes
- Thermostop-function for guaranteed temperatures
- Independent wash and rinse arms guarantee an easy rotation
- Indented nozzles prevent blocking
- Tank strainer reduces soiling of the tank water

Thermolabel compliant

Easy to clean
- Deep drawn rack track for easy cleaning
- Wash and rinse arms can be removed without tools
- Integrated self-cleaning cycle

Robust and reliable
- Double-walled door and solid suspension guarantee reliable operation in the daily use
- Regular quality controls of all parts
- Production according to EN/ISO 9001

Easy to use
- Electronic control with digital temperature indication for easy operation
- Controls are easy to understand
- Integrated counter for cycles and water consumption, e.g. for control of water treatment system
- Automatic chemical hose filling

Easy to service
- Easy access
- USB connection for easier service access
- Drain pump and/or detergent dispenser can be retrofitted

Standard equipment:
- Electric cable, flexible water supply hose and drain hose
- Rinse aid dispenser

Rack equipment
1 **Plate Rack P-18-12**
1 **Cutlery Box with one Box CB1**

SPEC SHEET

Technical data
Pos. 1 Dishwasher Eco-F504-10B

Dimensions	**in [mm]**
Machine housing width	576 mm
Machine housing depth	604 mm
Depth when door is open	999 mm
Height	820 mm
Loading height	360 mm

Capacity	
Cycle time P1/P2*	60 / 150 sec.
Capacity**	Up to 60 Racks/h
Wash temperature	65 °C
Rinse temperature	85 °C
Tank capacity	25 l
Rinse water consumption/Rack P1/P2	2,3 l

Values of connection	
Heating Booster/Tank	5,6 kW (400 V: 1,9 kW)
Total loading	5,9 kW (230 V: 2,2 kW)
Rated Voltage	400 V/50Hz/3 (230V/50Hz/1)

*To reach set rinse temperatures even with cold water connection, the actual cycle-times extend accordingly.
** Theoretical performance

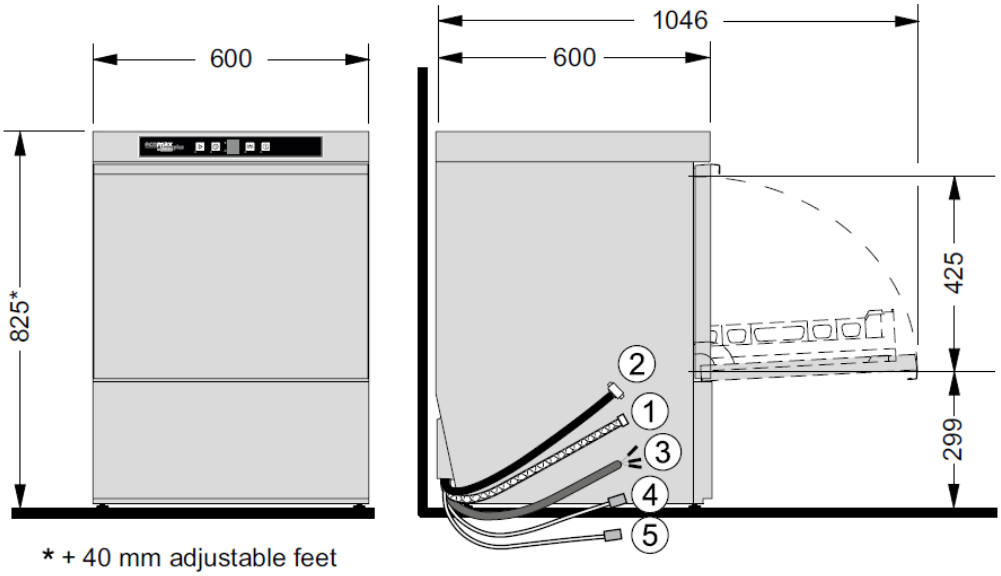

* + 40 mm adjustable feet